

PCT/AU2004/000813



**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Patent Office

Canberra

REC'D 28 JUL 2004

WIPO

PCT

I, JULIE BILLINGSLEY, TEAM LEADER EXAMINATION SUPPORT AND
SALES hereby certify that annexed is a true copy of the Provisional specification
in connection with Application No. 2003903146 for a patent by LLOYD
HARVEY WILLIAMS and KAYE ADELLE WILLIAMS as filed on
20 June 2003.

WITNESS my hand this
Thirtieth day of June 2004

J. Billingsley

JULIE BILLINGSLEY
TEAM LEADER EXAMINATION
SUPPORT AND SALES



A STRUCTURAL ASSEMBLY

FIELD OF INVENTION

The present invention relates to building structures involving securing fabric to
5 a frame. The present invention has particular but not exclusive application for
emergency and temporary shelters and greenhouses. Greenhouses are described
in the body of the specification as an example of the present invention and is
described in the specification by way of example only.

PRIOR ART

Greenhouses usually consist of a frame covered with shade cloth so to
protect plants housed within the greenhouse from the weather, particularly the
effects of the sun. The shade cloth is often attached by clips such as shown in US
5497537, clasps as disclosed in US 4378617, nail strips as shown in US 4974298, or
15 suspended on the frame by fabric loops. Each of these different forms of securing
the fabric to the frame has problems. Where the fabric is fastened at a fixed point,
such as with clips and clasps the fabric has a tendency to tear about the fastened
point during high winds or storms. Some methods of fastening the fabric also fail to
maintain the stretched position of the shade cloth over the frame subsequently
20 resulting in the frame not being adequately covered by the shade cloth.

OBJECT OF THE INVENTION

It is an object of the present invention to provide an alternative means for
securing fabric to a frame. It is a further object to provide an alternative structural
25 assembly whereby fabric is secured to the frame and covers the frame to form a
desired structure.

STATEMENT OF THE INVENTION

In one aspect the present invention broadly resides in an assembly for securing fabric to a frame including

- 5 a longitudinal frame member with a longitudinally extending recess, said recess having a plurality of longitudinally extending ribs on each opposing face;
 a resiliently deformable sealing member having a complementary profile to the recess; and
 a fabric member wherein said fabric member is locatable within said recess
10 and secured by insertion of the sealing member.

There are preferably two longitudinally extending ribs on each opposing inner face of the recess that can engage complementary grooves in the sealing member. The fabric member is preferably positioned so that it is captured by both ribs on one recess face when the sealing member is inserted. The advantage of being captured
15 by both of the ribs on one of the faces is that there are two fastening points thereby reducing the tendency for slippage or tearing of the fabric member. The advantage of having ribs on both inner faces of the recess is that the frame member may be placed in either orientation relative to the fabric member during fastening.

The frame member is preferably substantially cylindrical to provide integral
20 strength and surfaces without edges to avoid abrasive wear of the contacting fabric member.

The frame member is preferably connectable with other frame members. The frame member preferably has hollow ends that provide for the fitting of connector members or other frame members with connectable ends.

The resiliently deformable sealing member is preferably made of plastics and designed to deform during insertion with a spring bias that has a tendency to push the outer walls of the sealing member against the recess faces.

When inserted the sealing member is substantially flush with the cylindrical
5 frame member.

The fabric member may be any sized portion of a suitable fabric including shade cloth, canvas and plastics material.

In another aspect the invention broadly resides in a structural assembly for forming a desired structure including

10 a plurality of longitudinal frame members, each of said frame members has a longitudinally extending recess, each said recess has a plurality of longitudinally extending ribs on each opposing face;

connector members for connecting the frame members;

one or more resiliently deformable sealing members, each of said sealing
15 members has a complementary profile to the recess; and

one or more fabric members wherein each of said fabric members is locatable within said recess and secured by insertion of the sealing member.

The frame members, sealing member(s) and fabric member(s) are preferably as described in the various above mentioned embodiments. The connector
20 members may include a 90 degree joiner, a 120 degree joiner, a straight joiner, a three way joiner, a four way joiner, a spreader, an end adaptor, and one or more different types of brackets. Each of the connector members preferably has a connector portion locatable within the open end of the frame member. The connector portion preferably forms an inner sleeve. The connector portion has a
25 substantially cylindrical shape with one or more outwardly extending projections to

about the inner cylindrical surface of the frame member. The outwardly extending projections preferably are adapted to secure or lock against the inner surface of the frame member. The three way joiner, 120 degree joiner and 90 degree joiner may have an outer surface with a locator portion that is adapted to engage a

5 complementary locator portion of another member thereby fixing the position of the members relative to each other. One locator portion preferably has two or more dimples while a complementary locator portion has two or more pins that can engage the dimples. Preferably the end adaptor has a locator portion with two or more pins.

With the frame member and the connector members, different types of
10 structures can be formed. The different types of building structures include shade houses and greenhouses, shade tunnels, animal shelters, awnings, canopies, carports, temporary accommodation, emergency shelters, canopies on the back of trucks and bus shelters.

In a further aspect the invention broadly resides in a method of assembling a
15 structure including

building a frame with frame members and connecting members as described above;

positioning one or more fabric members over the frame; and

inserting the sealing member to secure the fabric member to the frame
20 member.

The fabric member is preferably sealed while tension is kept on the fabric member.

The integrity of the frame may be maintained by bolting the frame members and connector members together to avoid accidental disassembly. An advantage of
25 the system is that the assembly and disassembly can be relatively quick.

BRIEF DESCRIPTION OF THE DRAWINGS

In order that the present invention be more readily understood and put into practical effect, reference will now be made to the accompanying drawings wherein:

5 Figure 1 is a cross-sectional view of the frame member of the preferred embodiment;

 Figure 2 is a diagrammatic view of the frame member with the seal;

 Figure 3 is a cross-sectional view of the seal;

 Figure 4 is a side view of a 120 degree joiner with joining frame members;

10 Figure 5 is a cross-sectional view of the 120 degree joiner at A-A shown in Figure 4;

 Figure 6 is a cross-sectional view of the 120 degree joiner at B-B shown in Figure 4;

 Figure 7 is a diagrammatic view of a flange connecting bracket;

15 Figure 8a is a diagrammatic view of a vertical four way joiner while figure 8b is a diagrammatic view of a flat four way joiner;

 Figure 9 is a side view of an end bracket;

 Figure 10 is an alternate side view of an end bracket;

 Figure 11 is a side view of a diagonal tube bracket;

20 Figure 12 is an alternate side view of a diagonal tube bracket;

 Figure 13 is an end view of the diagonal tube bracket;

 Figure 14 is a diagrammatic view of an end adapter;

 Figure 15 is a side view of a 90 degree joiner;

 Figure 16 is a diagrammatic view of a three way joiner;

25 Figure 17 is a diagrammatic view of a post bracket;

Figure 18 is a diagrammatic view of the frame of a shelter;

Figure 19a is a diagrammatic view of a fascia awning while Figure 19b is an off-the-wall awning; and

Figure 20 is a diagrammatic view of an emergency shelter.

5

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

In Figures 1 and 2 there is shown a tubular frame member 10 and a longitudinal recess 11 in which the seal 12 can be located. The tubular frame member 10 is substantially cylindrical in shape. The longitudinal recess 11 is substantially rectangular in shape with two spaced apart ribs 13 on each of the opposing side walls 14, 15 with a first groove 16 formed between the two ribs 13 and a second groove 17 formed between recess base wall 18 and adjacent rib 13.

The seal 12 is also shown in Figure 3. The seal 12 has a top portion 21 and legs 22, 23. Legs 22, 23 are shaped so that when they are pressed together they deform but resume their initial shape in the absence of the deforming force. When there is a deforming force, legs 22 and 23 move together with bridge portions 24, 25 abutting. The lower portions 26, 27 of each leg 22, 23 respectively moves to fit within the recess 11. Each leg 22, 23 has projections 28, 29 that are shaped to complement grooves 16 and 17 within the recess 11. When the seal 12 is positioned within the recess 11, the projections 28, 29 engage grooves 16, 17 respectively, ribs 13 engage grooves 30 either side of projection 28 and top portion 21 forms a seal with the outer surface of the frame member 10. The seal 12 is made of plastics preferably extruded PVC.

The frame member 10 is made of aluminum by an extruded process.

A 120 degree joiner 40 is shown in Figure 4. The 120 degree joiner 40 comprises two connector sleeve portions 41, and a corner portion 42. The connector sleeve portions 41 have outwardly extending ribs 43 for abutting the inner surface of frame member 10. The connector sleeve portions 41 have a recess 44 that nests
5 about recess 11 on the tubular frame member 10. The fitting of the recess 44 about recess 11 serves to prevent the 120 degree joiner 40 from rotating within the frame member 10. The corner portion 42 also has a recess portion 45. The recess portion 45 is in line with recess 44. The recess portion 45 has two ribs on each opposing sidewall surface and is similar in shape to recess 11. The recess portion 45 can
10 accommodate the seal 12. Recess 44 is shown in Figure 6 while recess portion 45 is shown in Figure 5. The 120 degree portions 40 are typically used to form framework for roofs.

The 120 degree joiner 40 is cast-molded in two parts and assembled with guide pins and sockets. Apertures 51, 52 shown in Figure 6 allow the two part 120
15 degree joiner 40 to be bolted together to maintain the assembled state. There are other corner joiners including 106 degree joiner and 148 degree joiner.

In Figure 7 there is shown a connector bracket 70 having a connector portion 71 and flange 72. The connector portion 71 is shaped to form a sleeve substantially surrounding the frame member 10. The flange 72 can serve as a window or door
20 jamb or architrave.

Figure 8a shows a vertical four way joiner 80 with four connector portions 81 and a corner portion 82. Figure 8b shows a flat four way joiner 83 with four connector portions 84 and a corner portion 85. The connector portions 81,84 are similar to the connector portions 41 described in the 120 degree joiners 40. The four way joiners

80,83 are used to connect intersecting frame members during the construction of shelter.

Figures 9 and 10 show an end bracket 90 having a connector portion 91 and spreader portion 93. The connector portion 91 has longitudinally extending ribs 92 which can abut the inner wall of the frame member 10 when inserted within the frame member 10. The spreader portion 93 is substantially cup-shaped for supporting frame members 10. The end bracket 90 can be used to provide support and connection between horizontally and vertically displaced frame members 10.

Figures 11, 12 and 13 show a diagonal tube bracket 110 which has a connector portion 111 and a fastening portion 112. The connector portion 111 is cylindrical and can be positioned within frame member 10 while fastening portion 112 can be bolted to another suitable frame member by the fastening of a bolt through aperture 113 and another frame member or connector. The diagonal tube bracket 110 is useful when the cylindrically shaped frame member 10 needs to be fastened to a substantially flat or rectangular frame member.

An adaptor 140 is shown in Figure 14 and has an adaptor portion 141 and a connector portion 142. The connector portion 142 is similar to connector portions of other bracket and joiner members. The connector portion 142 is insertable within the frame member 10 and has ribs 145 for abutting against the inner wall of the frame member 10. The connector portion 142 is substantially cylindrical in shape with a portion removed to allow the adaptor 140 to be positioned relative to the recess 11 of the frame member 10. The adaptor portion 141 has a circular wall 143 with two locating pins 144 that extend outwardly. The adaptor 140 is designed for use with a frame member 10 to abut against a joiner or bracket with corresponding locating sockets.

In Figure 15 there is shown a 90 degree joiner 150 with connector portions 151 and corner portion 152. The connector portions 151 are insertable within frame members 10 and are similar to connector portions of other bracket and joiner members. The corner portion 152 has a locator portion 153 that has a circular wall 154 with four locating sockets 155. The locator portion 153 has four spaced apart locator sockets 155 that allow the adaptor 140 to be positioned in one of two alternate 90 degree positions.

In Figure 16 is shown a three-way joiner 160 where there are three connector portions 161 and a central portion 162. The three-way joiner 160 may have connector portions 161 in any suitable arrangement. The connector portions 161 are similar to connector portions of other bracket and joiner members. Central portion 162 may have a locator portion similar to the locator portion 153 shown in Figure 15.

A post bracket 170 is shown in figure 17 and comprises a post portion 171 and a bracket portion 172. The post portion 171 is an elongate portion with a rectangular cross-section while the bracket portion 172 has a substantially U-shaped bracket sharing a base wall 173 with the post portion 171. The post bracket 170 is used to attach to the length of the frame members 10 to provide a flat surface for doorway frames and window architraves and lintels.

There may be other types of connectors such as other multi-way joiners and U-shaped brackets.

From these frame members, connectors and joiners different types of structures can be formed. These include by way of example, shelters (Figures 18 and 20) and awnings (Figures 19a and 19b). Frame members, connectors and joiners may be used to produce other types of structures including patio awning,

greenhouses or shade houses, pergolas and car ports. As well the same structure may have different designs such as patio awning with bull nose section.

With reference to Figure 18 there is shown a shelter 181 with frame members 10 forming uprights, roof frames and base frames. The frame members 10 are connected by three way joiners 160, 120 degree joiners 40, 148 degree joiners and adapters 140. The frame is covered with a shade cloth to form a greenhouse. In contrast, a similar frame is covered with canvas 201 and fly screen mesh 202 in Figure 20 to provide an emergency or temporary shelter 200. Permanent doors may be installed in the shelters with the use of post brackets and flange brackets.

In Figures 19a and 19b, there is shown two different types of awnings for screening a window from the effects of the sun. Figure 19a shows a fascia type awning 190 whereas Figure 19b shows an off-the-wall type awning 191. The frame for the awnings comprises frame members 10 connected by 90 degree joiners. Shade cloth 192 is stretched across the frame and fixed in position by seal 12.

When the frame has been constructed, fabric such as shade cloth, canvass, plastic sheeting or any other suitable material may be inserted within the recess and fixed in position by the seal. The fabric is clamped in position by the engagement of ribs 13 of the frame member 10 with recesses 30 on the seal 12. With two ribs 13 either side of recess side walls 14,15 the fabric is clamped in two positions irrespective of which side the fabric is placed. As a consequence the resulting structure can be assembled quickly and with the covering fabric securely fastened.

ADVANTAGES

The advantages of the present invention includes the quick assembly of a suitable frame with the rapid fixing of fabric covering the frame by a removable seal.

With the different types of connectors and joiners, different types of structures of variable design can be formed for temporary or permanent use.

VARIATIONS

5 It will of course be realised that while the foregoing has been given by way of illustrative example of this invention, all such and other modifications and variations thereto as would be apparent to persons skilled in the art are deemed to fall within the broad scope and ambit of this invention as is herein set forth.

10 Throughout the description and claims this specification the word "comprise" and variations of that word such as "comprises" and "comprising", are not intended to exclude other additives, components, integers or steps.

15

DATED THIS NINETEENTH DAY OF JUNE 2003

LLOYD WILLIAMS

by his Patent Attorneys

Wynnes Patent and Trade Mark Attorneys




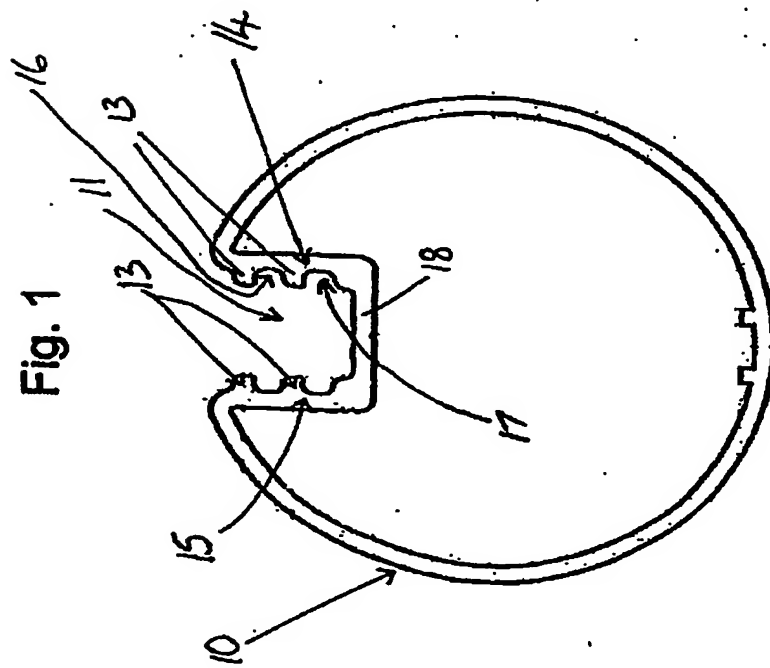


Fig. 3

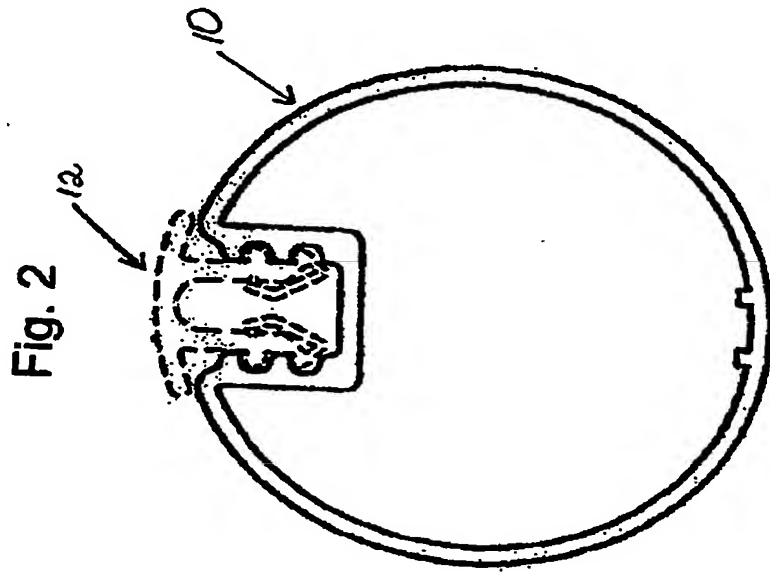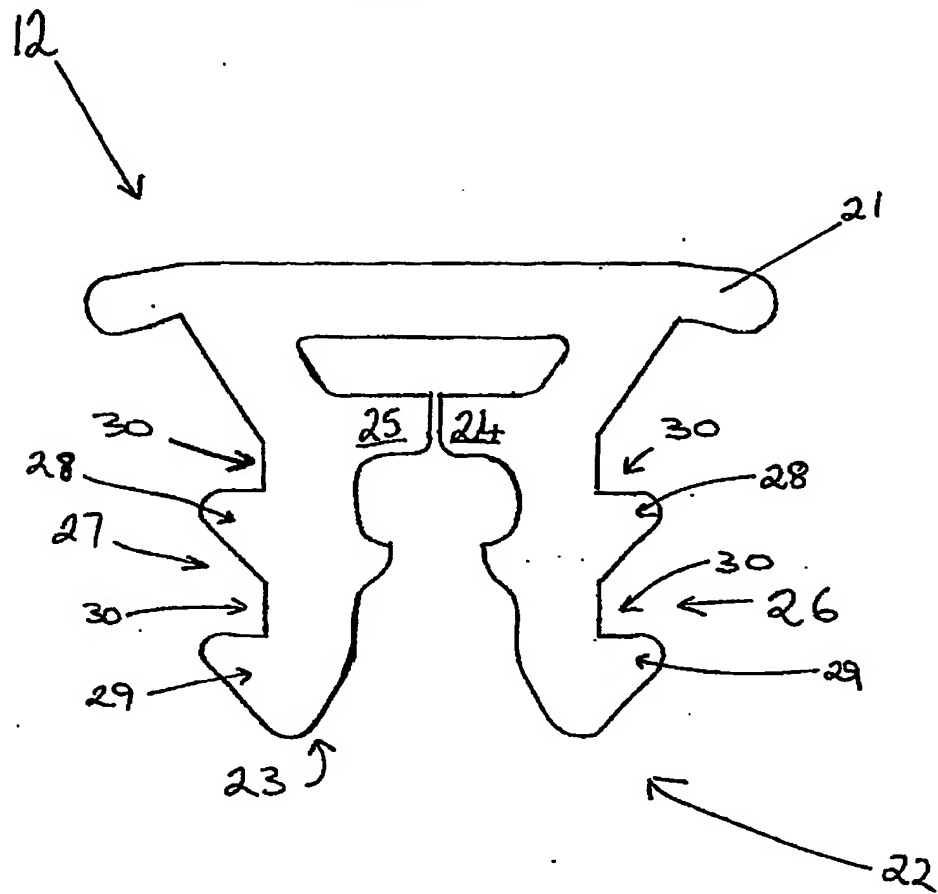


3/17

Fig. 4

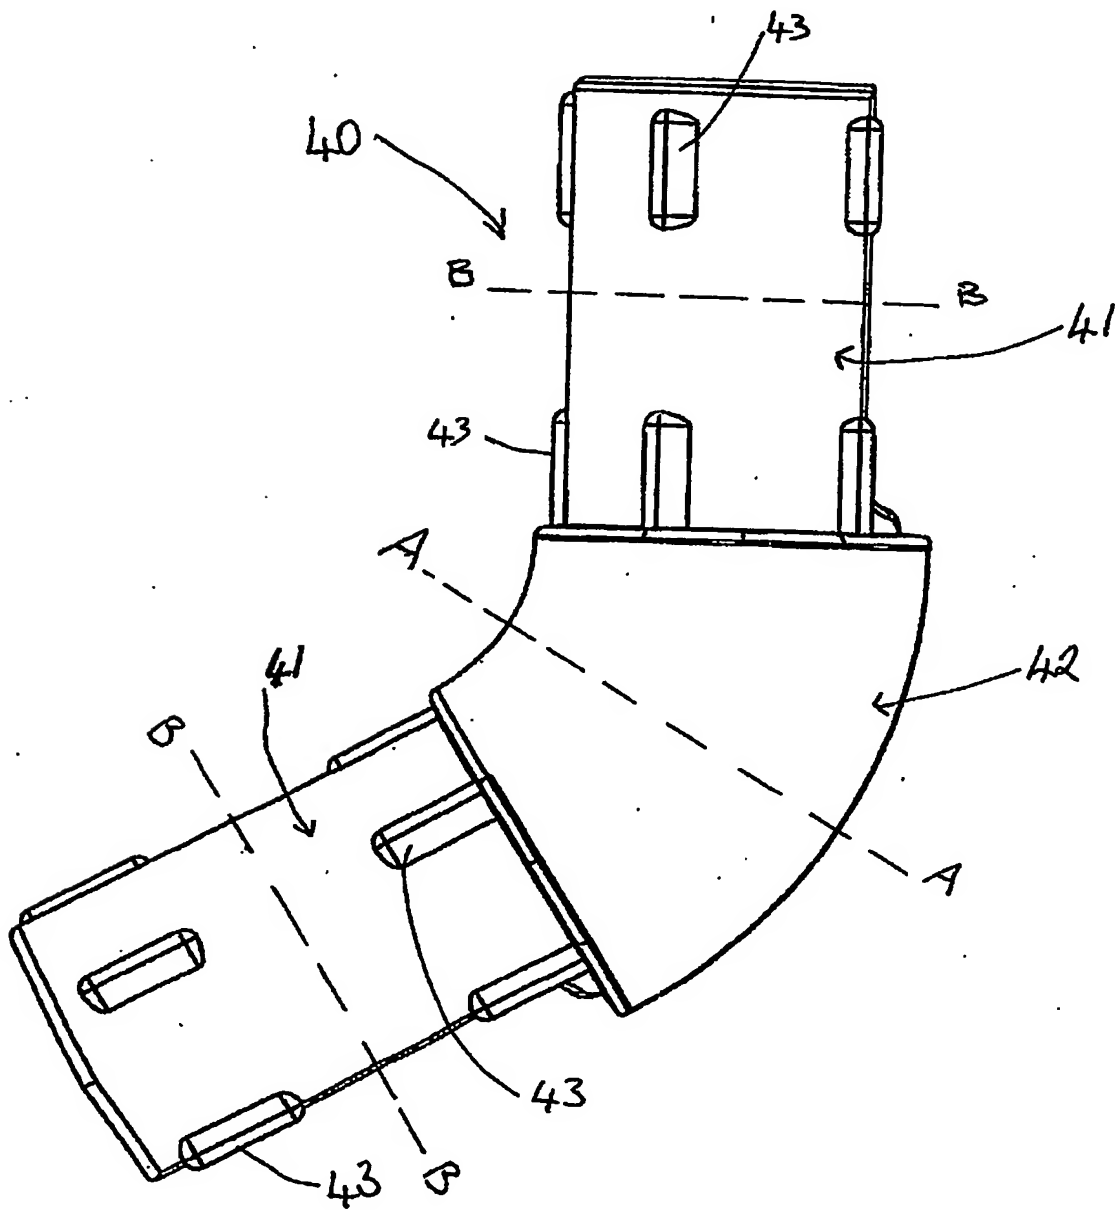

4/17

Fig. 5

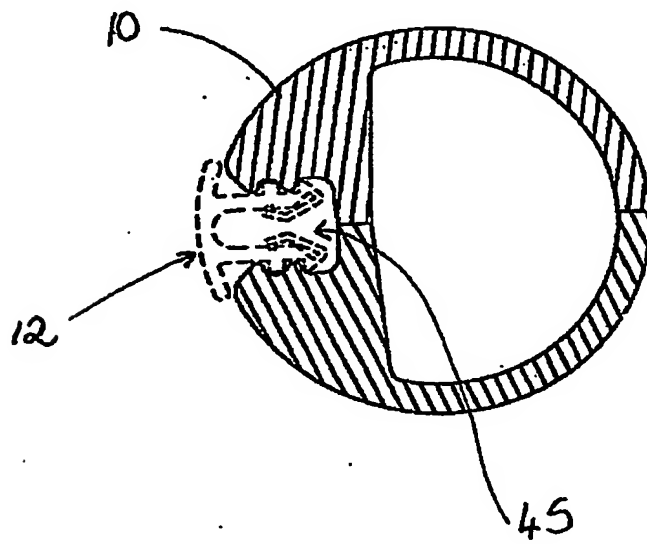

5/17

Fig. 7

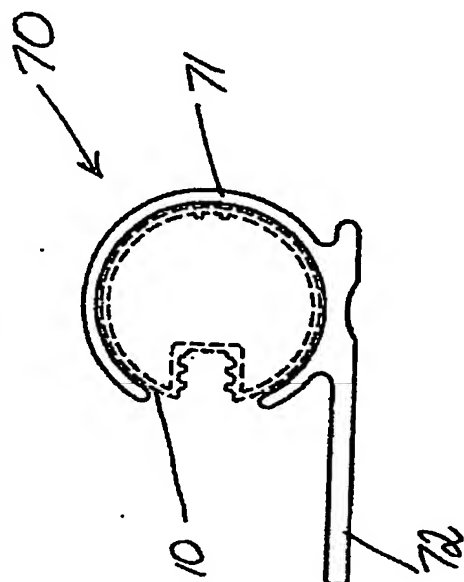


Fig. 6



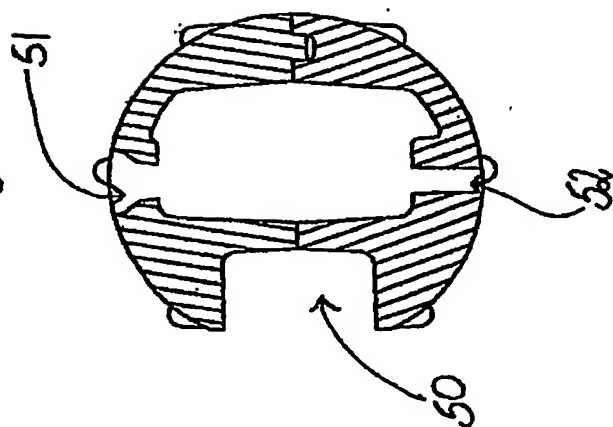


Fig. 8a

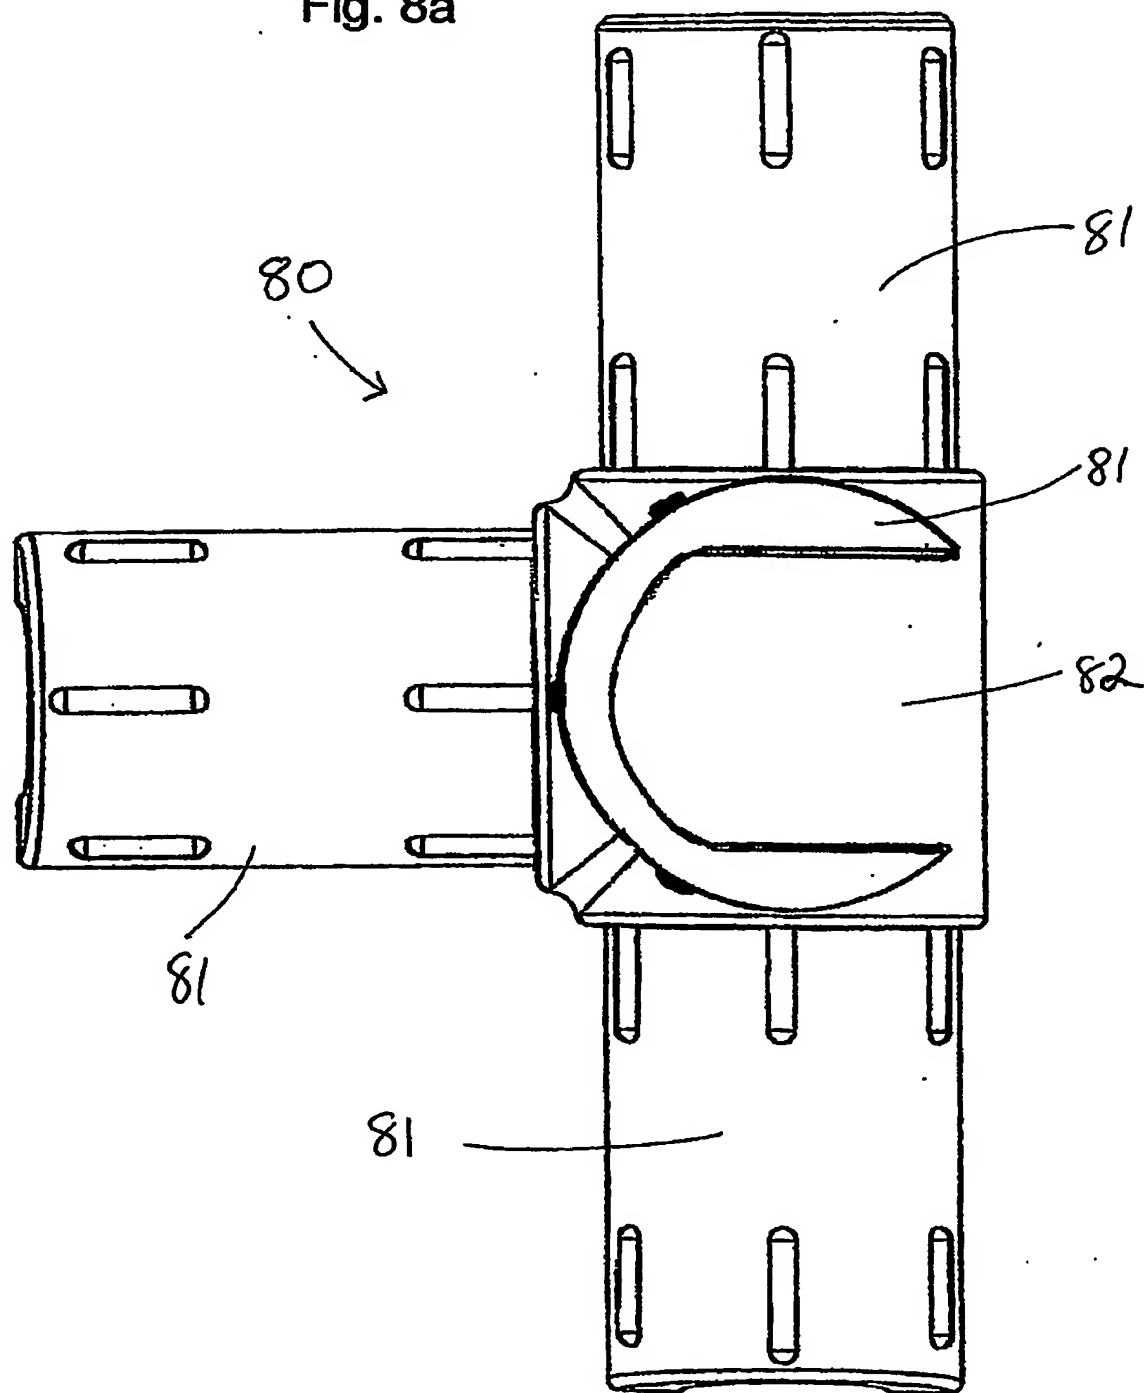

7/17

Fig. 8b

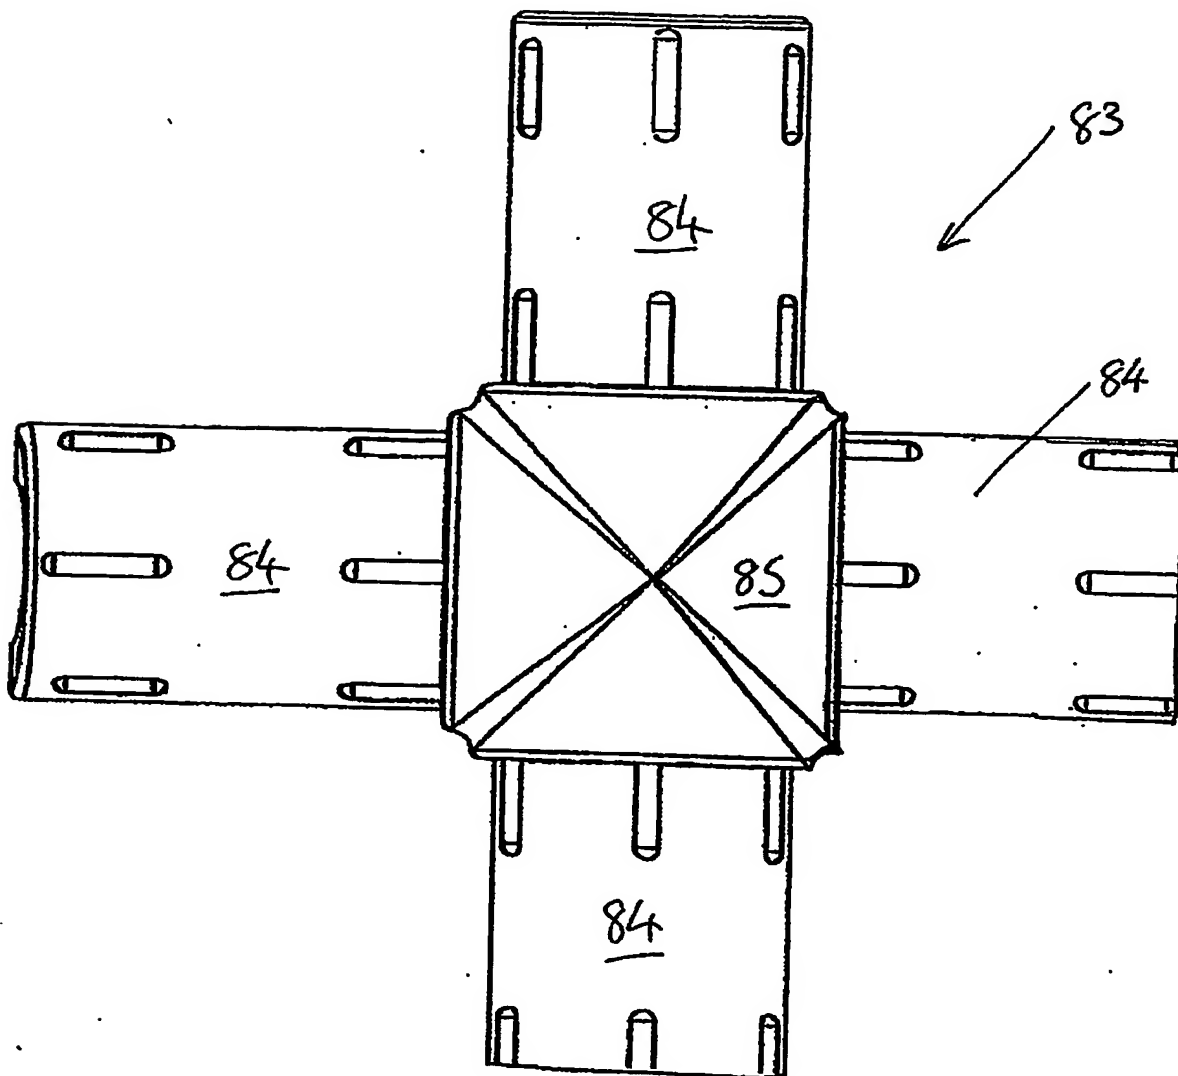

8/17

Fig. 10


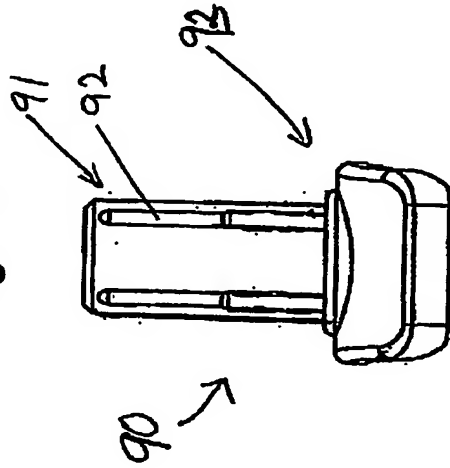


Fig. 9

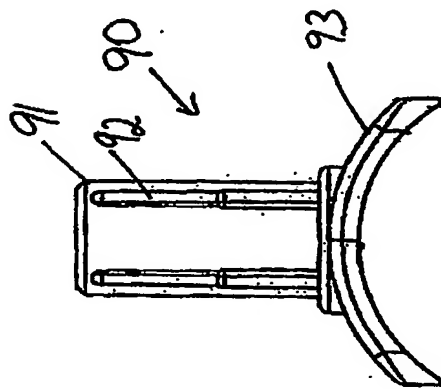

9/17

Fig. 12

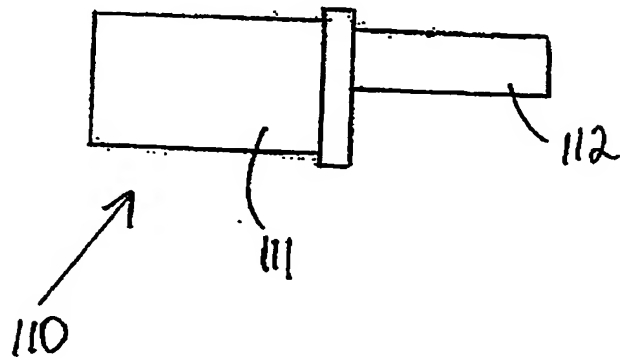


Fig. 11



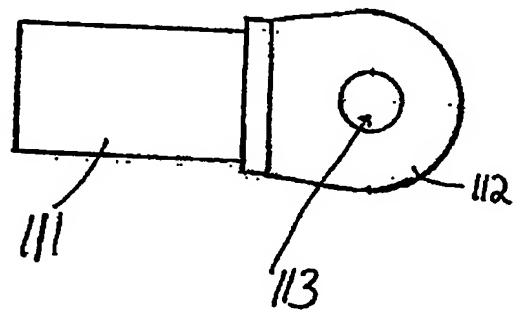


Fig. 13

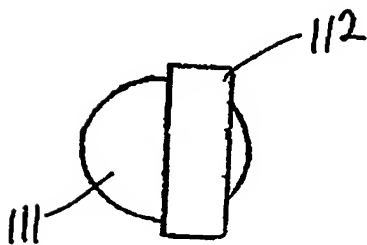


10/17

Fig. 14

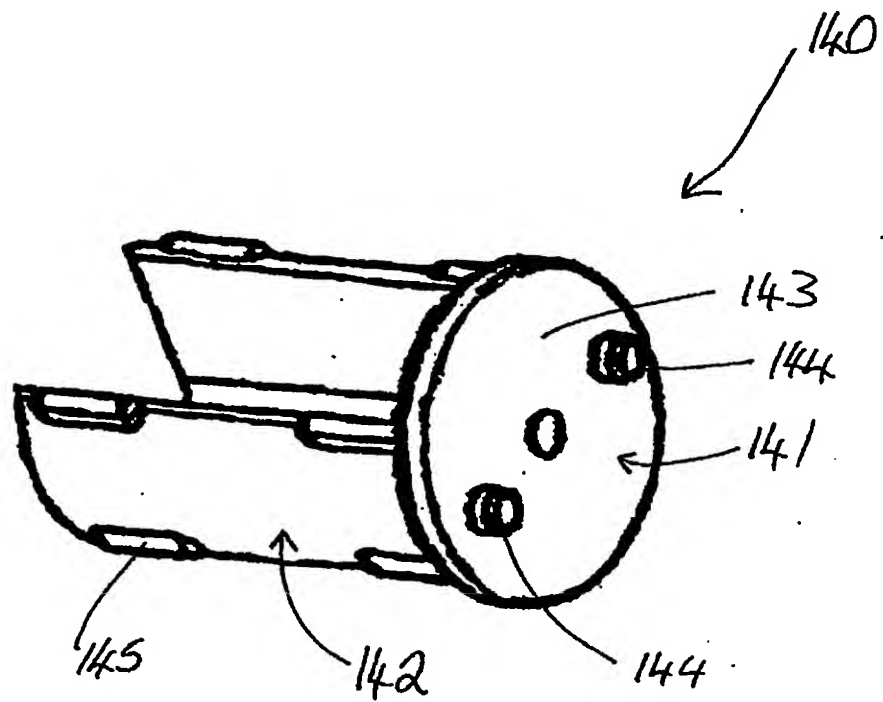


11/17

Fig. 15

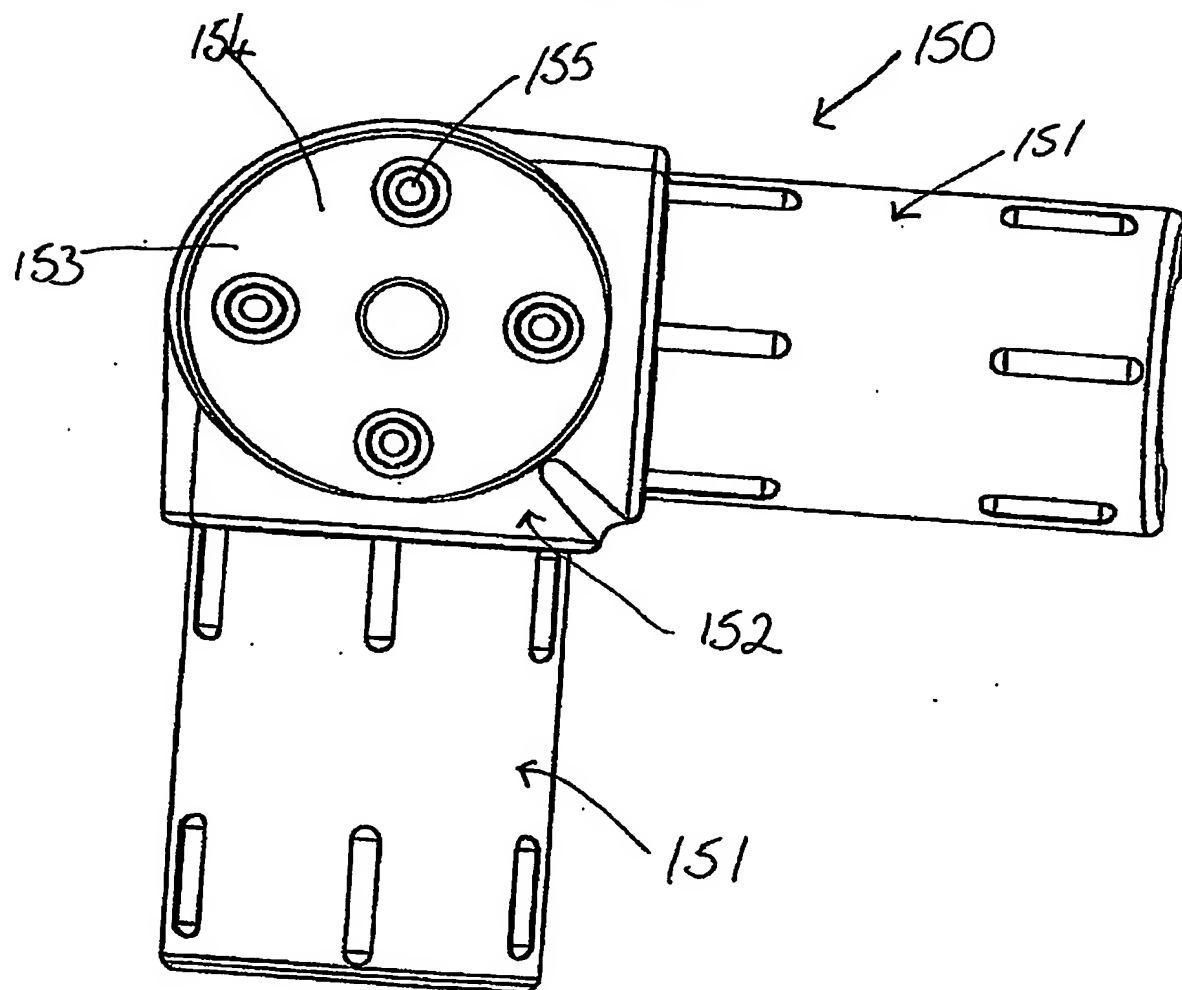

12/17

Fig. 16

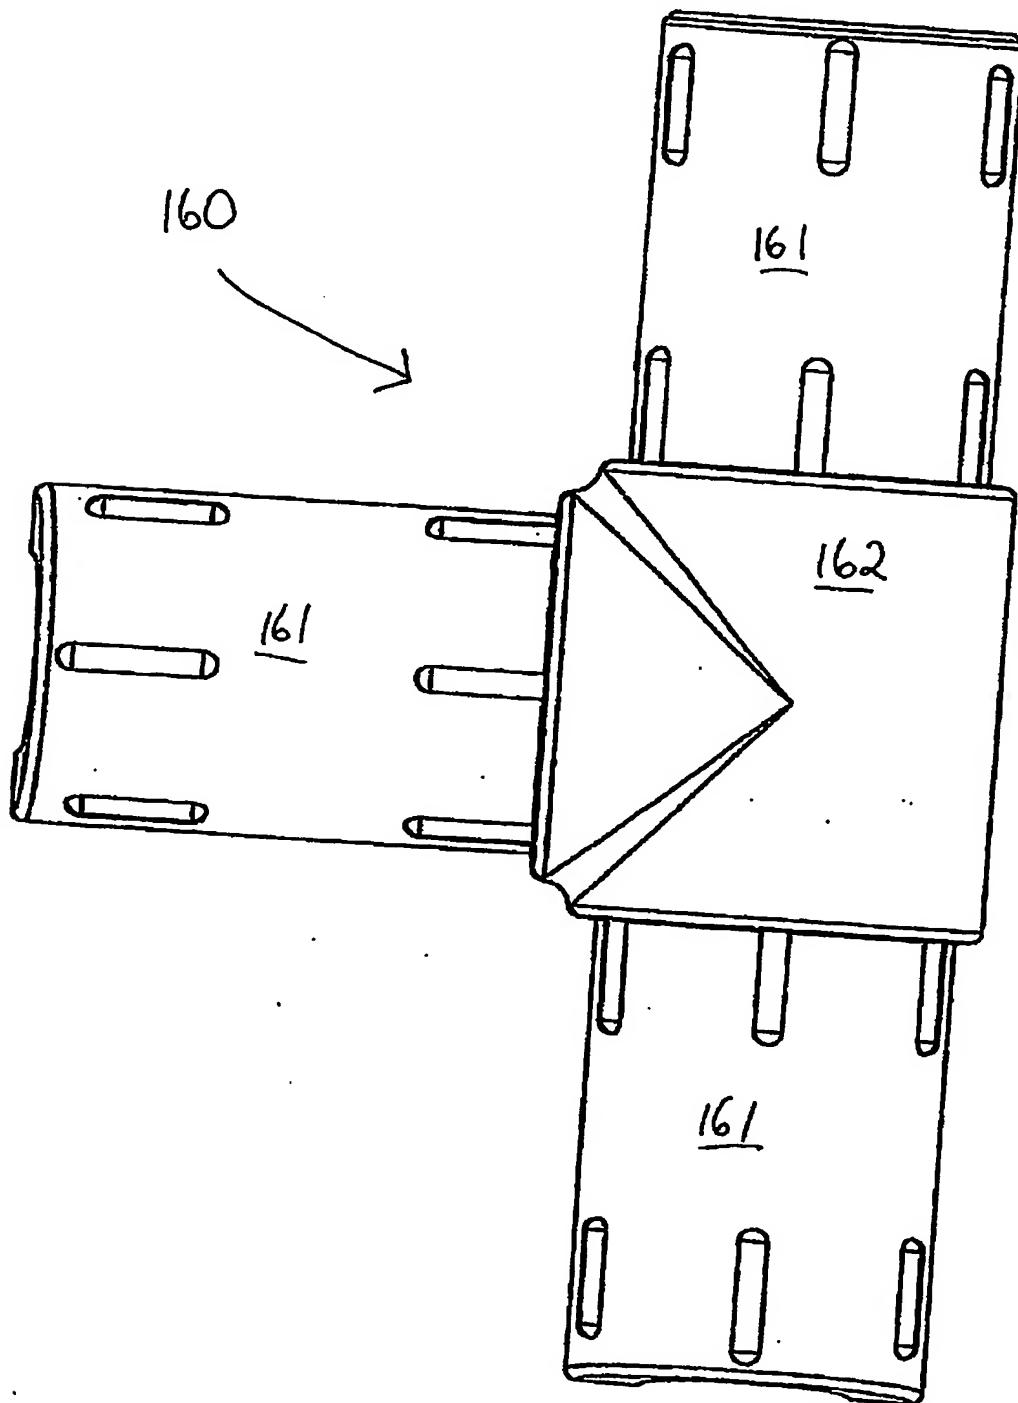

13/17

Fig. 17

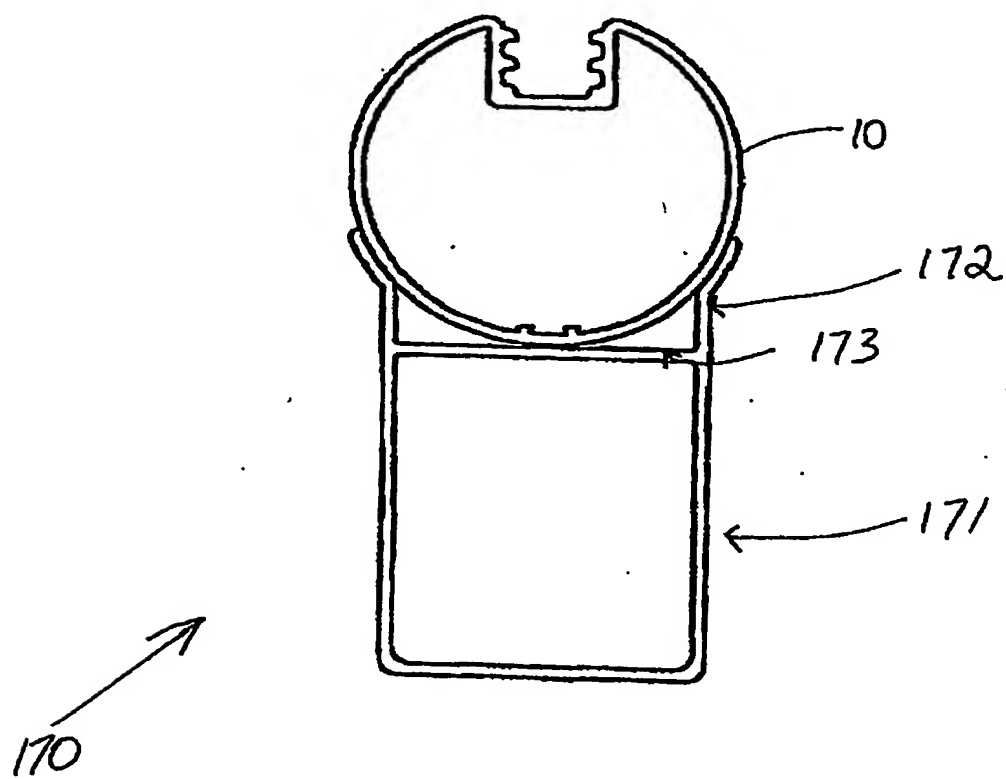


Fig. 18

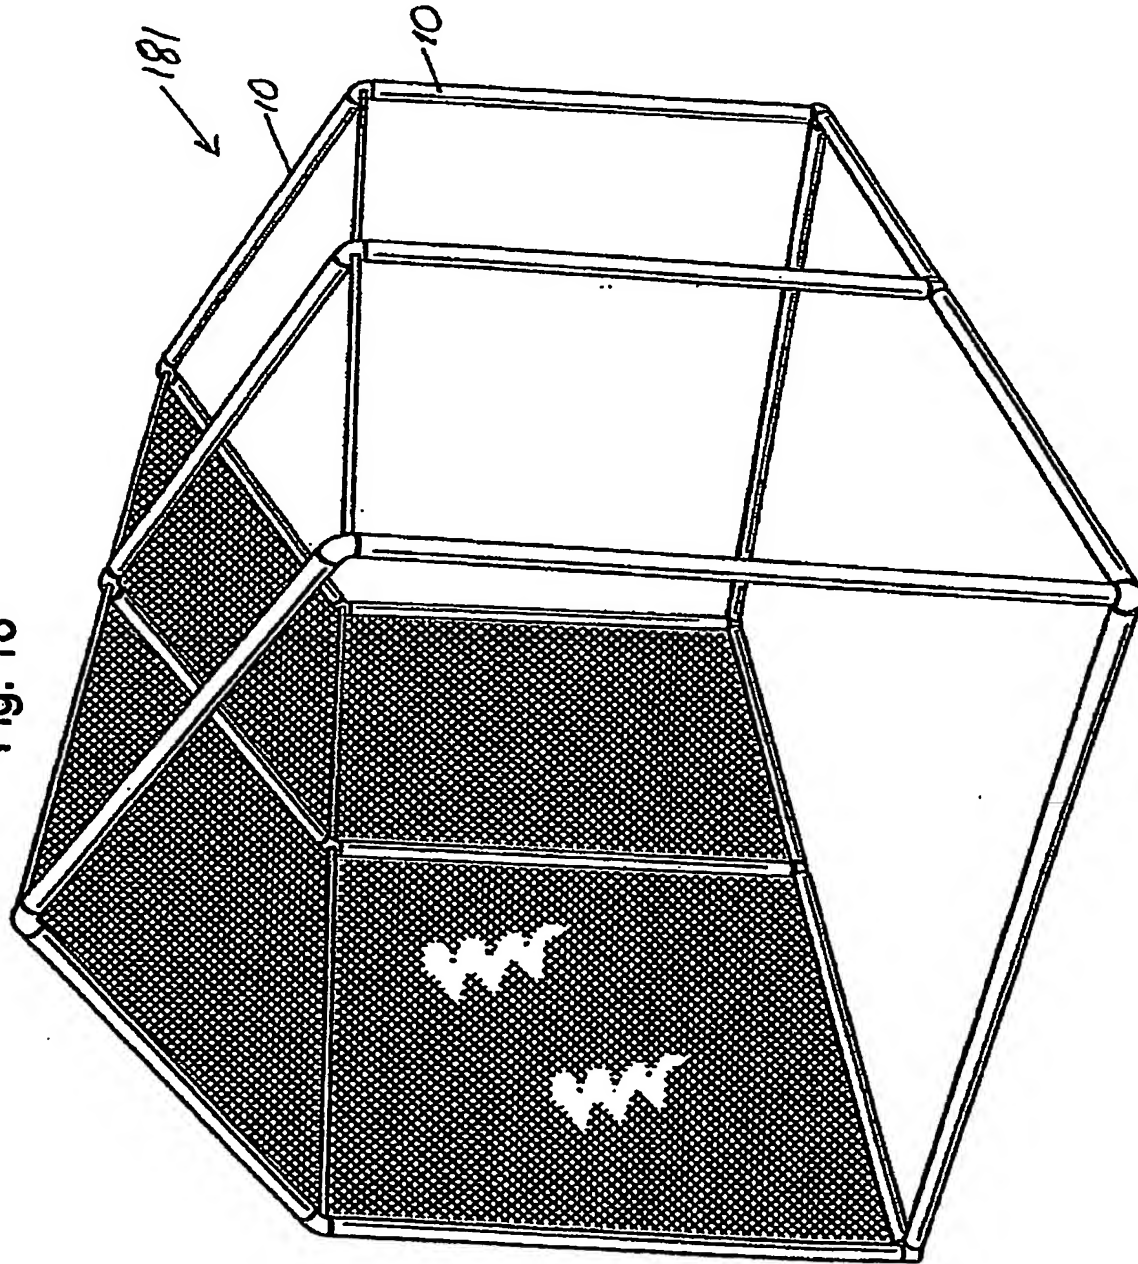


Fig. 19a

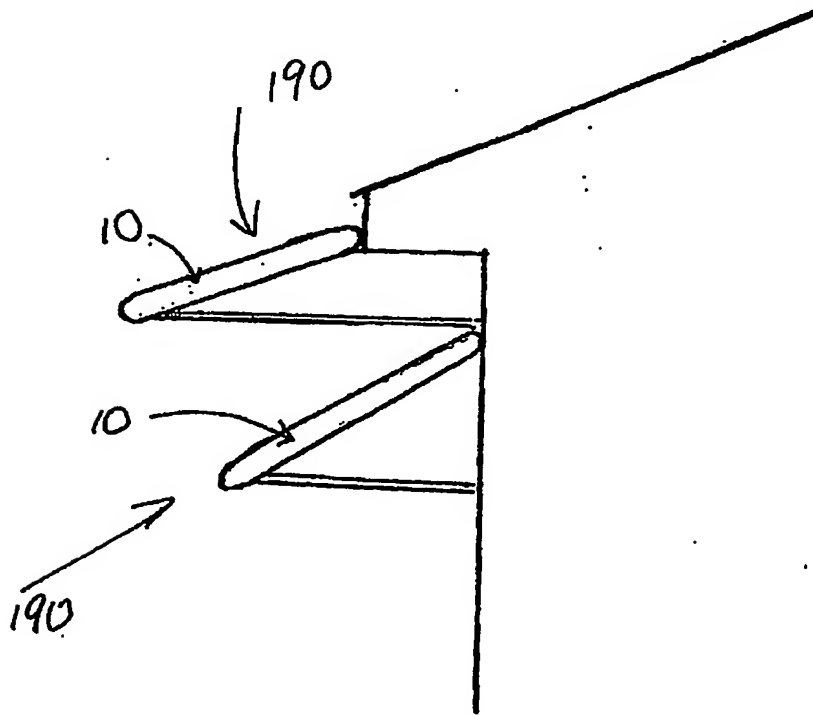


Fig. 19b

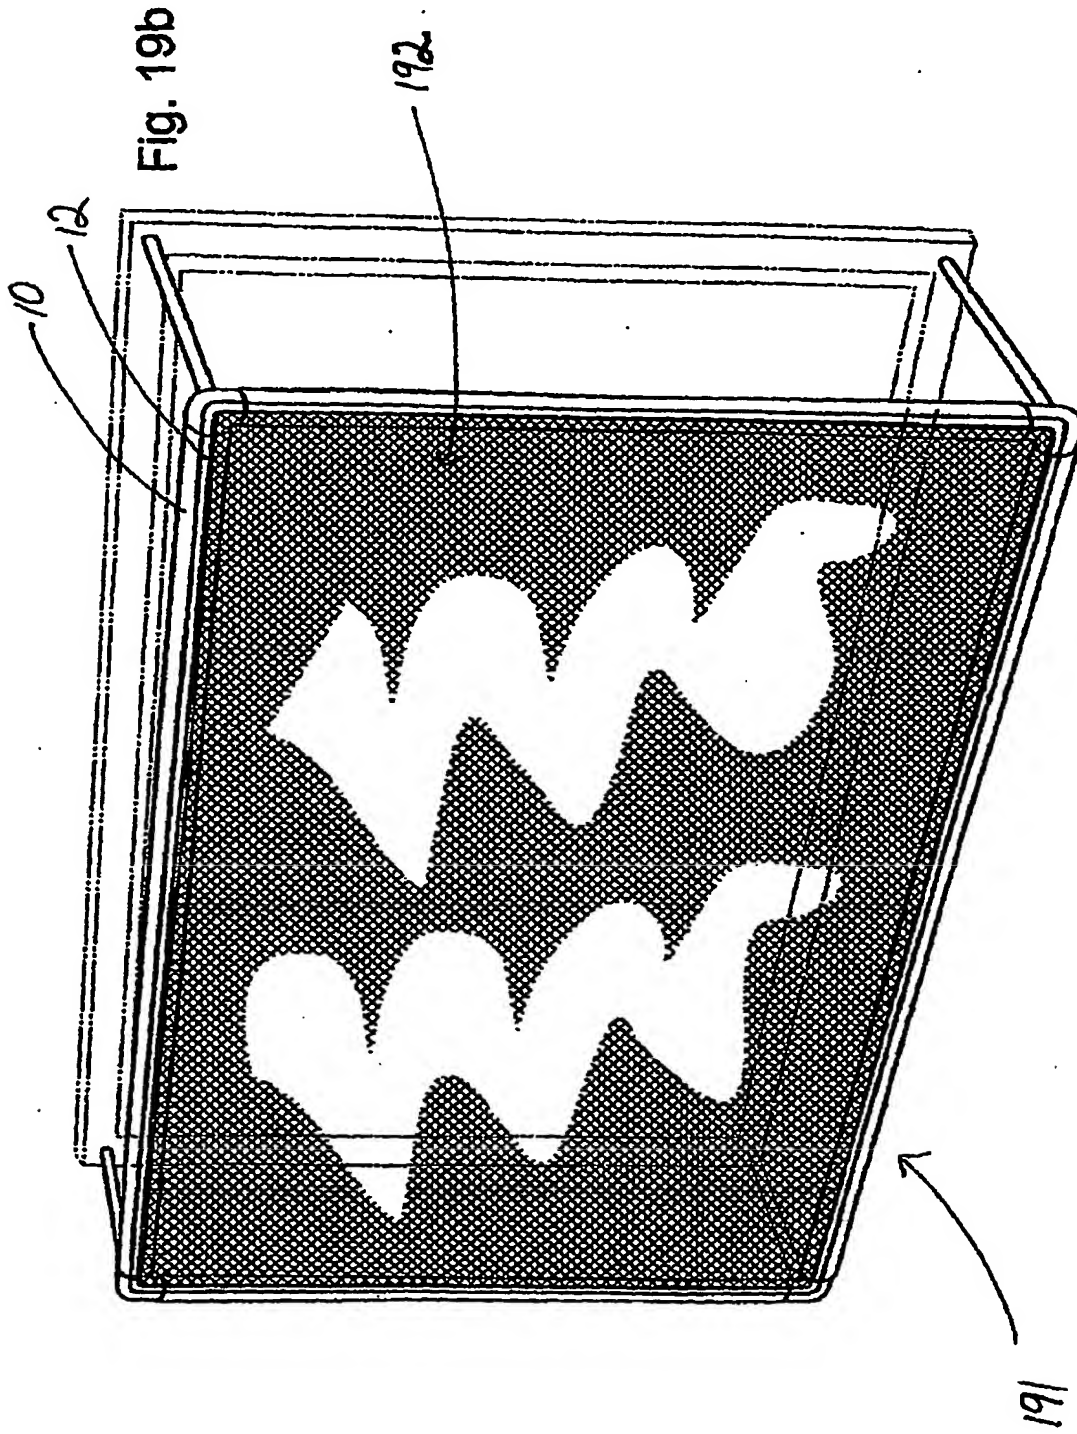


Fig. 20

